

Charging cable with connector T1 Mode 3, Straight, 10m



General information

Part no.:	E-323151-100
Type vehicle side	Type 1, AC 1-phase
Specification/Norm	IEC 61851-1

Charging connector and charging plug

Arrangement of phases	2p+PE and CS+CP
Current	32A
Current control contacts	2A
Rated operating voltage	200-250V
Rated operating voltage contro	30V
Insulation voltage	500V
Mean time to failure MTTF	>10 000 connections without load
Protection degree plugged in	IP44
Protection degree with closure	IP44

Charging connector and charging plug


Operating temperature range	-30°C - +50°C
Charging connector VDE certifi	40040174
Proximity circuit	330 Ohm, 150 Ohm
Locking	Locking lug Ø5mm for padlock, allowing an locking of the charging connector during the charging process
Contact surface material	Silver plated brass
Material of enclosure	strengthened thermo-shape material
Colour vehicle side	upper part black, midsection grey aluminium, lower part black

Charging cable

Charging capacity (kW)	7.4kW
Rated voltage	450/750V
Temperature resistance chargin	-40°C to +80°C
Description of the charging ca	Halogen free, flame-resistant, high mechanical resistance, very good cold flexibility, very good oil and fuel resistance, UV-, ozone resistant and weatherproof
Cross-section current-carrying	3 x 6,0mm ²
Cross section signal conductor	1 x 0,50mm ²
Insulation conductors	EPR (3G) EVI-2 (DIN EN 50620)
Cord length	10m
Jacket material	TPE-U (11Y) EVM-1 (n. DIN EN 50620 acc. to DIN EN 50620)
Cable colour	black
Outer diameter D	12,8 ± 0,40 mm
Minimum bending radius static	4 x D
Minimum bending radius dynamic	7,5 x D
Handling	Incorrect use caused by torsional stress together with simultaneous expansion of cable should be avoided
Standards charging cable	ISO 4982-2, DIN EN 50363-10-2, DIN EN 50267-2-1, IEC 60228, DIN EN 50620, IEC 60332-1

Dimensional drawing

Further cable lengths and individual colour adjustment on request.
 Passing on to third parties only with the approval of Bals Elektrotechnik GmbH & Co. KG
 Subject to technical modifications and typographical errors
 Only valid at the time of printing. In case of recycling, check the current version.

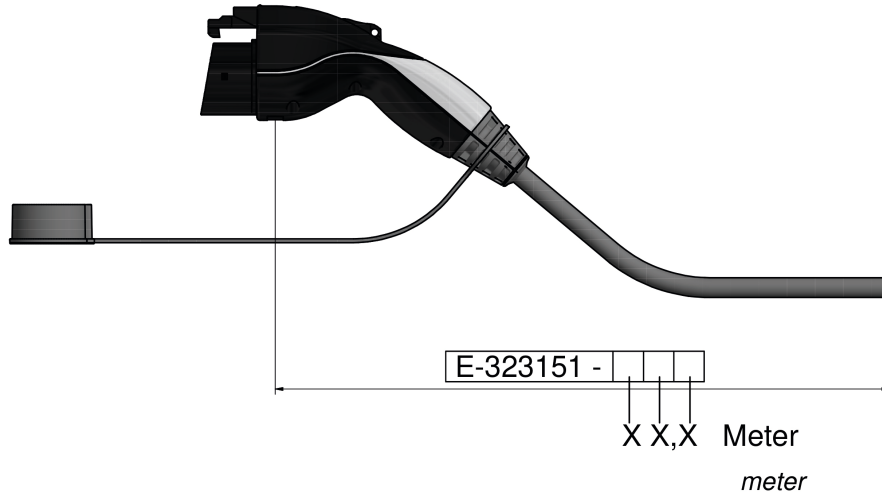

Beispiel: = 11,5 Meter
example: meter