

مقبس شحن



...1.

83205160700

...

ترتيب المراحل

20 أمبير

شدة التيار

فضة

خامة سطح التلامس


مع ملامس مزوي

تقنية التوصيل


خامة العلبة

علبة سوداء 9005

لون الأجهزة






...




Ladesteckerverriegelung
plug interlock

Funktion function	PIN 1	PIN 4
Entriegeln unlocking	+	-
Verriegeln locking	-	+

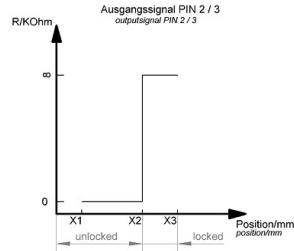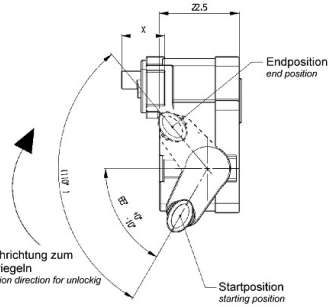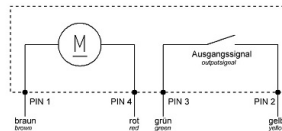


X	Status status	Position in mm position in mm
X1	nicht verriegelt unlocked	12,15 : 0,5
X2	Schaltpunkt switching point	15,60 : 0,5
X3	verriegelt locked	17,00 : 0,5

Vierleiter-Variante
four wire - variant

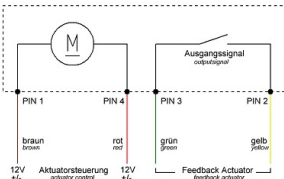



Dreileiter-Variante
three wire - variant

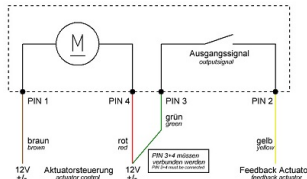


...

Anschluss connection	Leitungsart wire type	Querschnitt cross-section	Farbe color
L1	H07V2-K	2.5mm²	braun / brown
L2	H07V2-K	2.5mm²	schwarz / black
L3	H07V2-K	2.5mm²	grau / grey
N	H07V2-K	2.5mm²	blau / blue
PE	H07V2-K	2.5mm²	grün-gelb / green-yellow
CP	H05V2-K	0.5mm²	rot / red
PP	H05V2-K	0.5mm²	weiß / white
Aktuator PIN1	FLRY-A	0.5mm²	braun / brown
Aktuator PIN2	FLRY-A	0.5mm²	gelb / yellow
Aktuator PIN3	FLRY-A	0.5mm²	grün / green
Aktuator PIN4	FLRY-A	0.5mm²	rot / red

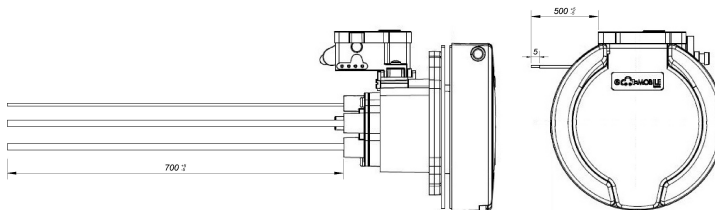

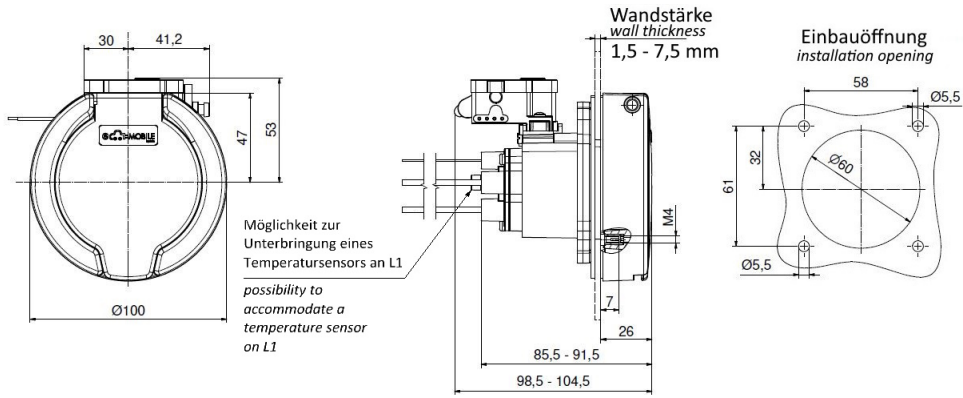

...

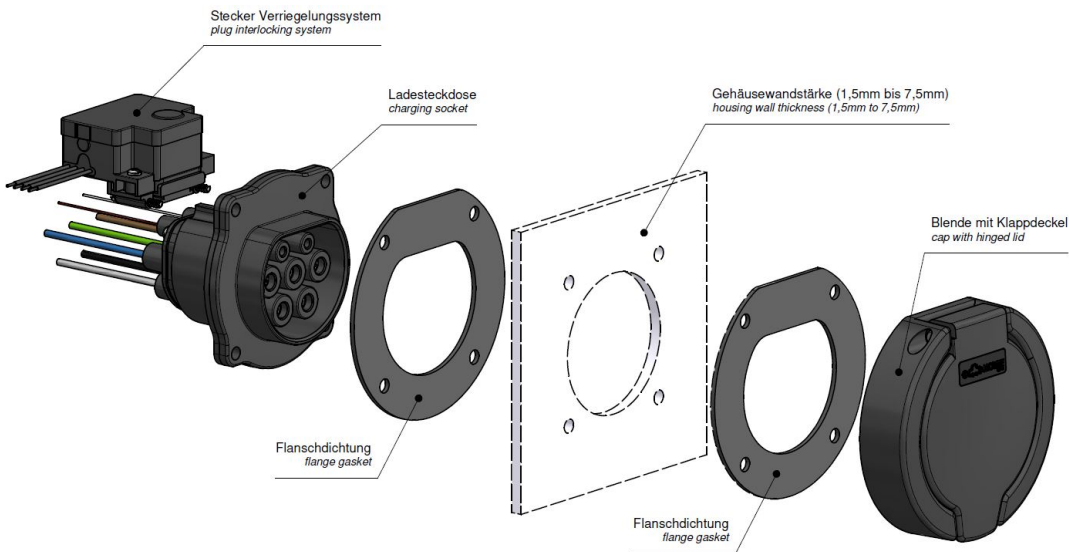

...